

50/125 SSF™ Multimode OM3 Rugged Micro Distribution Riser I/O


Type: OM3, OFNR, CSA FT4

Cleerline SSF™ 2-12 strand fiber Rugged Micro Distribution cable is composed of a 3.0 mm loose tube style SSF™ cable subunit within an overall Riser rated PVC jacket.

SSF™ Rugged Micro Distribution is ideal for installation outdoors in ducts or indoors in riser spaces and tray installations. This cable incorporates an additional layer of fiberglass yarns for strength. SSF™ Rugged Micro Distribution is also rodent resistant.

Cleerline SSF™ Micro Distribution Multimode is fully compatible with all common connector systems for standard 50/125 multimode fiber.

The included SSF™ fiber provides extreme durability and strength.

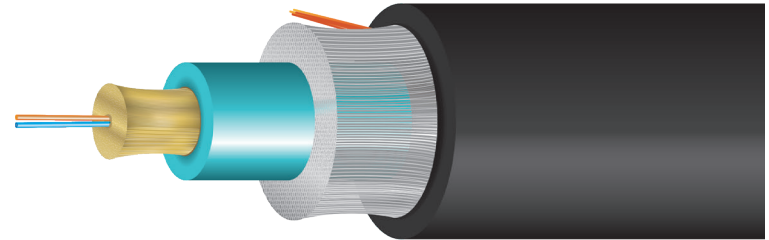


3D VIEW

FEATURES AND BENEFITS

- High mechanical strength, superior fatigue (nD = 30)
Compatible with common connector systems for 50/125 multimode
- Up to 10,000x the bend longevity of traditional fiber
- Integral SSF™ coating provides glass protection
- Dielectric construction
- Exclusive 250 µm Soft Peel acrylate
- Rodent resistant

APPLICATIONS

- Installation in ducts outdoors
- Riser space and tray installations
- ETL listed type OFNR
- ANSI/TIA-568-C.3 compliant

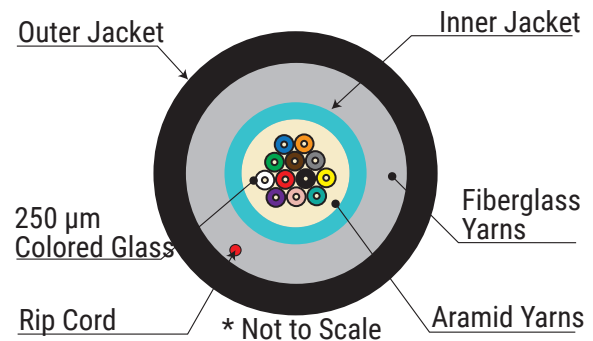

TYPICAL CROSS SECTION

PART NUMBER	FIBERS	DESCRIPTION	TYPE	O.D.	WEIGHT (LB / 1000 FT)
2RMD501250M3R	2 Fibers	2 Strand 50/125 SSF - 1000 ft Spool	Riser Indoor/Outdoor	6.1 mm	29
2RMD501250M3R-B	2 Fibers	2 Strand 50/125 SSF - Cut to Order	Riser Indoor/Outdoor	6.1 mm	29
6RMD501250M3R	6 Fibers	6 Strand 50/125 SSF - 1000 ft Spool	Riser Indoor/Outdoor	6.1 mm	29
6RMD501250M3R-B	6 Fibers	6 Strand 50/125 SSF - Cut to Order	Riser Indoor/Outdoor	6.1 mm	29
12RMD501250M3R	12 Fibers	12 Strand 50/125 SSF - 1000 ft Spool	Riser Indoor/Outdoor	6.1 mm	29
12RMD501250M3R-B	12 Fibers	12 Strand 50/125 SSF - Cut to Order	Riser Indoor/Outdoor	6.1 mm	29

CONSTRUCTION

FIBER	
Fibers	2-12
Type	50/125 Multimode OM3
Coating	250 μm "Soft Peel" S-Type Coating
Color Coding	Per TIA/EIA 598C

JACKET	
Type	Riser Rated PVC + UV (Indoor/Outdoor)
Color	Black
Outer Diameter	6.1 mm
Subunit	3.0 mm, Aqua PVC + UV
Markings	Sequential Foot Markings
Strength Member	Kevlar + water blocking yarns
Circumferential Strength Member	Fiberglass yarns

PHYSICAL DATA	
Storage Temperature Range	-40°C to +70°C
Operating Temperature Range	-40°C to +70°C
Installation Temperature Range	-20°C to +55°C
Max Tensile Load (Installation)	2700 N (607 lbf)
Max Tensile Load Long Term	890 N (200 lbf)
Min. Bend Radius, Unloaded	1 x O.D.
Cable Outside Diameter, Nominal	6.1 mm
Cable Package	1000 ft Reel or customer request, spooled
Rating	FT4 - Riser
Crush Resistance (TIA/EIA 455-41A)	100 kgf / mm
Impact Resistance (TIA/EIA 455-25B)	1500 impact cycles
Flexing @ 90 degrees (TIA/EIA 455-104A)	2000 flexing cycles

ENVIRONMENTAL CHARACTERISTICS (SSF™ FIBER)	
Temperature Dependence, 850 nm and 1300 nm Induced Attenuation -60°C to + 85°C	$\leq 0.5 \text{ dB / km}$
Watersoak Dependence, 850 nm and 1300 nm Induced Attenuation at 20°C for 30 days	$\leq 0.5 \text{ dB / km}$
Damp Heat Dependence, 850 nm and 1300 nm Induced Attenuation at 85°C, 85% R.H., 30 days	$\leq 0.5 \text{ dB / km}$
Dry Heat Dependence, 850 nm and 1300 nm Induced Attenuation at 85°C, 30 days	$\leq 0.5 \text{ dB / km}$

PHYSICAL CHARACTERISTICS (SSF™ FIBER)		
Core Diameter	50.0 \pm 2.5 μm	
Core Non-circularity	$\leq 6\%$	
Core / Hybrid Cladding Concentricity Error	$\leq 3.0 \mu\text{m}$	
Hybrid Cladding Diameter	125 \pm 2 μm	
Hybrid Cladding Non-Circularity	$\leq 2.0\%$	
Soft Peel Jacket Identifier	245 \pm 10 μm	
Coating Strip Force	100 g	
Fiber Curl	$\geq 2 \text{ m}$	
Proof Test	100 kpsi	
Dynamic Fatigue (n_d) 23°C, 41% R.H.	≥ 31.72	
Bend Induced Attenuation, 850 nm	2 turns around 15 mm radius mandrel	$\leq 0.2 \text{ dB}$
	2 turns around 7.5 mm radius mandrel	$\leq 0.5 \text{ dB}$
Length	1.0 - 8.8 Km	

OPTICAL CHARACTERISTICS (SSF™ FIBER)		
Attenuation Coefficient	850 nm	$\leq 4.0 \text{ dB/km}$
	1300 nm	$\leq 1.5 \text{ dB/km}$
Numerical Aperture	0.200 \pm 0.015	
Overfilled Modal Bandwidth	850 nm	$\geq 1500 \text{ MHz} \cdot \text{km}$
	1300 nm	$\geq 500 \text{ MHz} \cdot \text{km}$
High Performance EMB	850 nm	$\geq 2000 \text{ MHz} \cdot \text{km}$

BACKSCATTER CHARACTERISTICS (SSF™ FIBER)		
Attenuation Directional Uniformity	$\leq 0.05 \text{ dB/km}$	
Attenuation Uniformity	$\leq 0.05 \text{ dB}$	
Group Index of Refraction	850 nm	1.481
	1300 nm	1.476

COMPLIANCE	
ETL Listed Type OFNR, CSA FT4, IECA S-83-596. RoHS Compliant Directive 2011/65/EU SSF™ conforms to the requirement of IEC 60793-2-10 A1a, ISO/IEC 11801 & ITU-T G.651.1 850 nm Laser-Optimized 50 μm core multimode fiber for 10 Gb/s and above applications.	